


<b>Product Name:</b>	<b>Ninja Medalist Course</b>
<b>Model Number:</b>	<b>YP320</b>
<b>Size:</b>	Length: 44' 2" Width: 27' 4" Height: 10' 1"
<b>Fall Height:</b>	7'
<b>Foundations:</b>	12
<b>Concrete Volume:</b>	3.5 cubic yards
<b>COMPLIANT WITH:</b>	ASTM F-1487 CSA Z614
<b>Ages:</b>	5-12 years
<b>Use Zone:</b>	Length: 56' 2" Width: 39' 4"

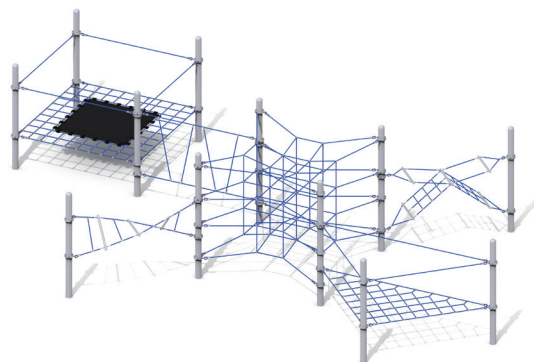

### Technical Details:

#### Support Post

Support Posts shall be 5-1/2" (140mm) diameter steel tubing. After fabrication the frame shall be powder coated in accordance with the specifications herein.

#### Climbing Nets

20mm diameter rope consists of 6 main strands, each strand containing 24 galvanized steel reinforcing strands within a polyamide sleeve, wrapped around a solid polyamide core for a total of 144 reinforcing strands. Ropes shall achieve a Class 7-8 colorfastness rating.

#### Rope Ball Connectors and End Fittings

One-piece compressed aluminum ball connector or end fitting, compressed in place with 150,000 pounds source (667kN) to prevent the connection from moving and causing premature cable wear.

#### Fasteners

All fasteners shall be stainless steel with locking patch or locking compound (by others).

#### Metal Finish

Polyester (Powder) Coating – The polyester coating shall be uniformly applied by the electro-static method to a minimum thickness of four mils. Promptly after application of the powder, the coating shall be oven-cured at 350 degrees Fahrenheit. The color(s) of the polyester coating shall be from the manufacturer's standard color selection.

#### Installation

Installation recommended by a licensed playground contractor, trained and certified on the applicable playground installation methods and standards, preferably certified by manufacturer or National Playground Contractors Association.