


Product Name:	Dual Pyramid Tower
Model Number:	YP384
Size:	Length: 60' 5" Width: 46' Height: 19' 1"
Fall Height:	7'
Foundations:	9
Concrete Volume:	5.9 cubic yards
COMPLIANT WITH:	ASTM F-1487 CSA Z614
Ages:	5-12 years
Use Zone:	Length: 72' 5" Width: 58'

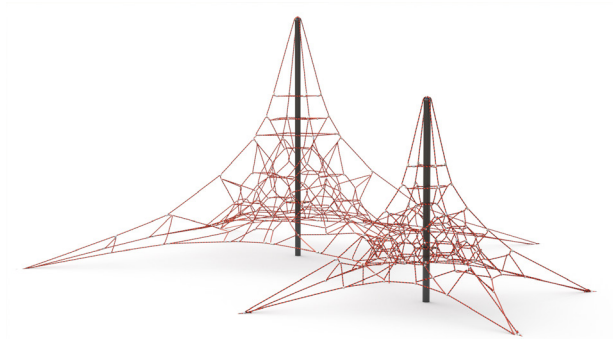

Technical Details:

Support Post

This will be 5-1/2" (139.8mm) diameter steel tubing, which after fabrication shall be powder coated in accordance with the specifications herein.

Climbing Nets

20mm diameter rope consists of 6 main strands, each strand containing 24 galvanized steel reinforcing strands within a polyamide sleeve, wrapped around a solid polyamide core for a total of 144 reinforcing strands. 22mm edge ropes will contain a solid core of wound steel cables in place of the polyamide core for a total of 168 steel reinforcing strands. Ropes shall achieve a Class 7-8 colorfastness rating.

Rope Ball Connectors

One-piece compressed aluminum ball connector, compressed in place with 150,000 pounds source (667kN) to prevent the connection from moving and causing premature cable wear.

Rope End Fittings

One-piece compressed stainless steel end fitting.

Turnbuckles

These will be steel alloy that will withstand a maximum load of over 87,675 pounds force (390kN) along the main axis.

Flexible Surfaces

3/8" (10mm) thick textile-reinforced rubber belt.

Fasteners

All fasteners shall be stainless steel with locking patch or locking compound.

Metal Finish

Polyester (Powder) Coating – The polyester coating shall be uniformly applied by the electrostatic method to a minimum thickness of four mils. Promptly after application of the powder, the coating shall be oven-cured at 350 degrees Fahrenheit. The color(s) of the polyester coating shall be from the manufacturer's standard color selection.

Installation

Installation recommended by a licensed playground contractor, trained and certified on the applicable playground installation methods and standards, preferably certified by manufacturer or National Playground Contractors Association.