


Product Name: *Continuum*
Model Number: *YP458*
Size: Length: 19'-8"
 Width: 19'-9"
 Height: 9'-2"
Fall Height: 9'
Foundations: 17
Concrete Volume: 4 cubic yards
COMPLIANT WITH: ASTM F-1487
 CSA Z614
Ages: '5-12' years
Use Zone: Length: 31'-8"
 Width: 31'-9"

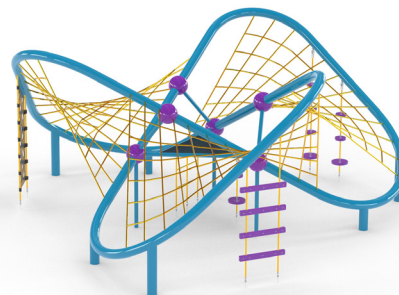

Technical Details:

Frame	Main Structure shall be 5-1/2" (139.8mm) diameter steel tubing, which after fabrication shall be powder coated in accordance with the specifications herein.
Climbing Nets	20mm diameter rope consists of 6 main strands, each strand containing 24 galvanized steel reinforcing strands within a polyamide sleeve, wrapped around a solid polyamide core for a total of 144 reinforcing strands. Ropes shall achieve a Class 7-8 colorfastness rating.
Rope Ball Connectors	One-piece compressed aluminum ball connector, compressed in place with 150,000 pounds source (667kN) to prevent the connection from moving and causing premature cable wear.
Rope End Fittings	One-piece compressed stainless steel end fitting.
Climber Pipe Junctions	7-3/4" (200mm) diameter structural aluminum balls with aluminum covers. Shall be powder coated in accordance with the specifications herein.
Tensioning	Tensioning is achieved by way of a galvanized shackle and stainless steel eyebolt located at each Climber Pipe Junction capable of drawing the cables a minimum of 4"(100mm)
Flexible Surfaces	3/8" (10mm) thick textile-reinforced rubber belt.
Panels	Shall be made from 3/4" (18mm) thick high density, UV-stabilized and color impregnated polyethylene.
Fasteners	All fasteners shall be stainless steel with locking patch or locking compound.
Metal Finish	Polyester (Powder) Coating – The polyester coating shall be uniformly applied by the electro-static method to a minimum thickness of four mils. Promptly after application of the powder, the coating shall be oven-cured at 350 degrees Fahrenheit. The color(s) of the polyester coating shall be from the manufacturer's standard color selection.
Installation	Installation recommended by a licensed playground contractor, trained and certified on the applicable playground installation methods and standards, preferably certified by manufacturer or National Playground Contractors Association.