



YP465 Date:06/26/24



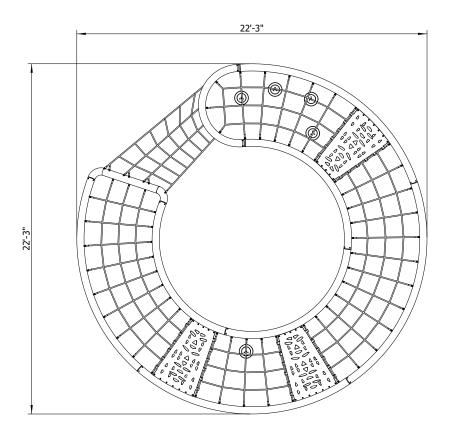

YP465 Date:06/26/24

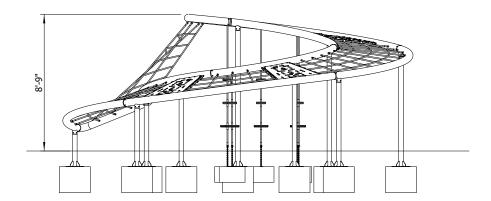

Product Specification

Product Name: Flat Spin Model Number: YP465

Size: Length: 22'3"

Width: 22' 3" Height: 8' 9"


Fall Height: 9'
Foundations: 15

Concrete Volume: 2.9 cubic yards
COMPLIANT ASTM F-1487
WITH: CSA Z614

 Ages:
 5-12 years

 Use Zone:
 Length: 34' 3"

 Width: 34' 3"

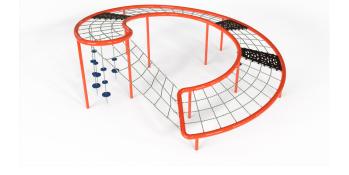

Technical Details:

Frame Main Structure shall be 5-1/2" (139.8mm) diameter steel tubing combined with 3-1/2" (89mm)

diameter steel tubing, which after fabrication shall be powder coated in accordance with the

specifications herein.

Climbing Nets 20mm diameter rope consists of 6 main strands, each strand containing 24 galvanized steel

reinforcing strands within a polyamide sleeve, wrapped around a solid polyamide core for a total of 144 reinforcing strands. Ropes shall achieve a Class 7-8 colorfastness rating.

Rope Ball ConnecOne-piece compressed aluminum ball connector, compressed in place with 150,000 pounds

tors

source (667kN) to prevent the connection from moving and causing premature cable wear.

Rope End Fittings
One-piece compressed stainless steel end fitting.

Flexible Surfaces
3/8" (10mm) thick textile-reinforced rubbber belt.

Panels Shall be made from 3/4" (18mm) thick high density, UV-stabilized and color impregnated

polyethylene.

Fasteners All fasteners shall be stainless steel with locking patch or locking compound.

Metal Finish Polyester (Powder) Coating – The polyester coating shall be uniformly applied by the electro-

static method to a minimum thickness of four mils. Promptly after application of the powder, the coating shall be oven-cured at 350 degrees Fahrenheit. The color(s) of the polyester

coating shall be from the manufacturer's standard color selection.

Installation Installation recommended by a licensed playground contractor, trained and certified on the

applicable playground installation methods and standards, preferably certified by manufacturer

or National Playground Contractors Association.

YP465 Date:06/26/24